

REFRACTORIES


Refractories eboris 1300 ultra ivory



Refractories eboris 1300 ultra black




DECLARATION

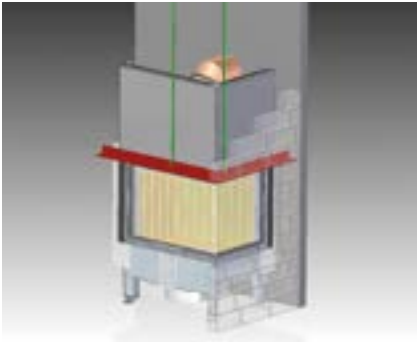


Mounting frame

Mounting frame for absorbing the load of the heating chamber above the lifting door. On-site, the mounting frame is attached to the back wall. The drawbars/turnbuckles will be fixed to the back wall or the ceiling. The weight of the convection chamber is carried by the wall and/or the ceiling. Available for 1-sided, 2-sided and 3-sided fireplace inserts.

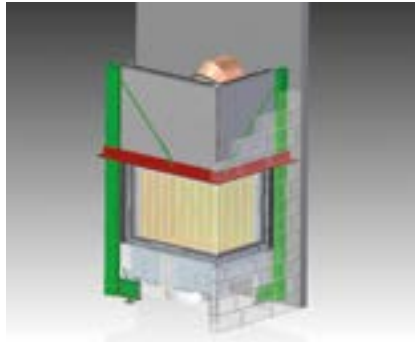

Mounting load frame MLR

A mounting frame for absorbing the load of the heating chamber above the lifting door, pre-installed on the fireplace insert and thermally uncoupled. The mounting frame is connected with the fireplace insert by a warp-resistant frame structure. All connecting rods for alignment are part of the delivery. Available for 2-side and 3-side fireplace inserts.

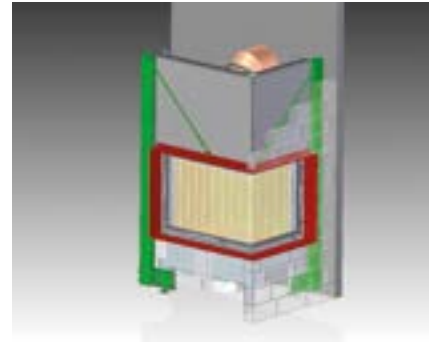

Installation frames BLR

A visible frame for absorbing the load of the heating chamber above the lifting door, pre-installed on the fireplace insert and thermally uncoupled. The system combines the advantages of the solid or bevelled frame (simple, clear connection piece for cladding the fireplace insert) with the advantage of thermal uncoupling of the mounting load frame. All connecting rods for alignment are part of the delivery. Available for 2-sided and 3-sided fireplace inserts.

PREMIUM & LEAN FRAME VARIANTS:

Refractories eboris 1300 ultra ivory

Refractories eboris 1300 ultra black



Standard:
Included in delivery



Black

NEW:
Can be ordered as an option



Titan


NEW:
Can be ordered as an option



White




Lean 2L-70h

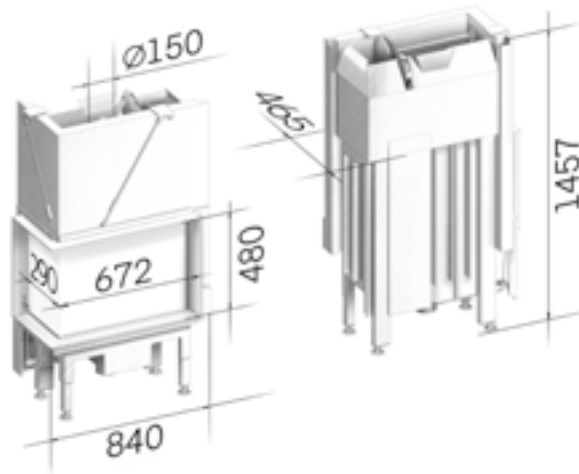


- RLA
- Firewood
- 25 cm
- Slide-up, not self-closing
- Front tilt door
Side fixed
- Single glazing with EnergyPlus coating
- A
- 7.9 kW
- 5.5 - 10.3 kW
- P. 185

Lean 2R-70h

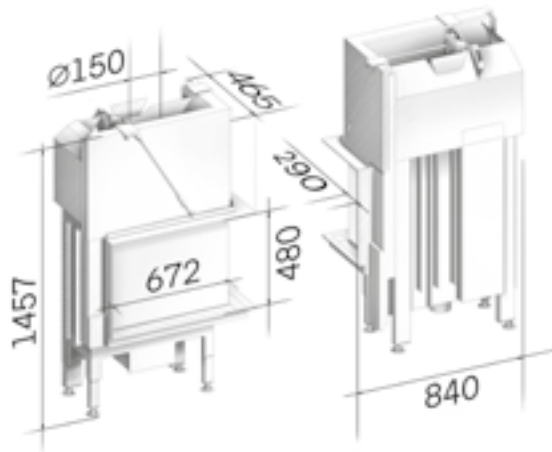

- RLA
- Firewood
- 25 cm
- Slide-up, not self-closing
- Front tilt door
Side fixed
- Single glazing with EnergyPlus coating
- A
- 7.9 kW
- 5.5 - 10.3 kW
- P. 185

Lean 3RL-70h

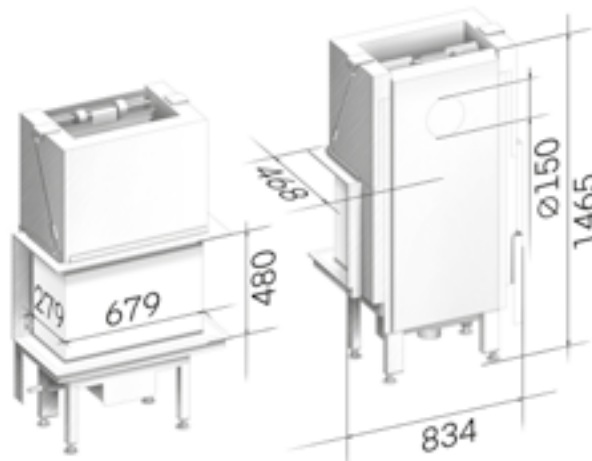

- RLA
- Firewood
- 25 cm
- Slide-up, not self-closing
- Front tilt door
Sides fixed
- Single glazing with EnergyPlus coating
- A
- 7.5 kW
- 5.3 - 9.8 kW
- P. 186